



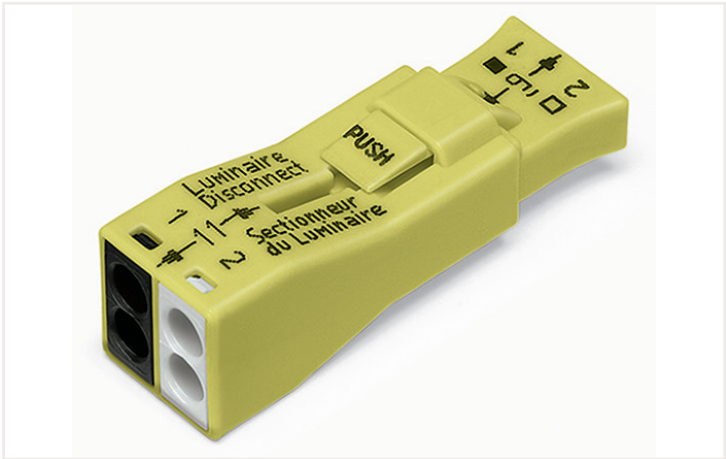

:  yellow

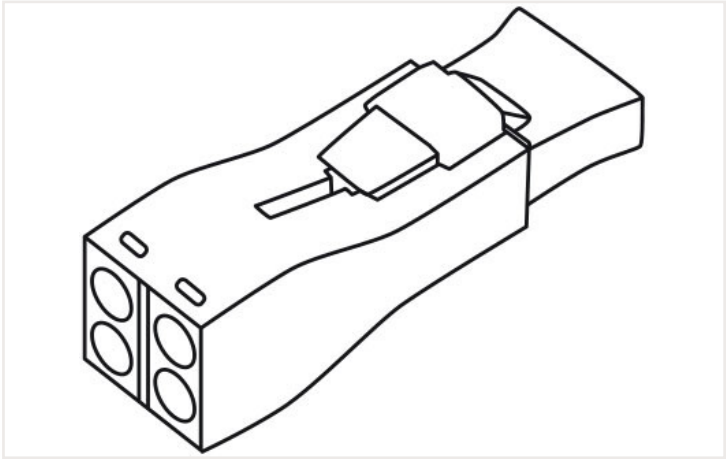

Electrical data			
Ratings per IEC/EN		Ratings per IEC/EN 2	
Ratings per	EN 60998	Ratings per 2	EN 61984
Nominal voltage (U _I /2)	400 V		
Rated surge voltage (U _I /2)	4 kV		
Rated current	6 A		

Connection data			
Total number of connection points	6	Connection 1	
Total number of potentials	2	Connection type 1	Plug
		Connection technology	PUSH WIRE®
		Actuation type	Push-in
		Connectable conductor materials	Copper
		Solid conductor	16 ... 12 AWG
		Stranded conductor	16 ... 12 AWG
		Abisolierlänge	11 ... 13 mm / 0.43 ... 0.51 inches
		Pole number	2

Connection 2			
Connection type 2	Socket		
Solid conductor 2	18 AWG		
Abisolierlänge 2	9 ... 11 mm / 0.35 ... 0.43 inches		



Physical data	
Width	13 mm / 0.512 inches
Height	13.2 mm / 0.52 inches
Depth	42 mm / 1.654 inches

Material data	
Note (material data)	Information on material data can be found here
Color	yellow
Fire load	0.103 MJ
Weight	4.8 g

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	500 (40) Pieces
Packaging type	Box
Country of origin VKOrg Germany	CN
GTIN	4066966245332
Customs tariff number VKOrg Germany	85366990990

Approvals and certificates

General approvals



CCA DEKRA Certification B.V.	EN 61984	NTR NL-7390
CCA DEKRA Certification B.V.	EN 61984	2178521.01
CCA DEKRA Certification B.V.	EN 60998	71-114174
CCA DEKRA Certification B.V.	EN 60998	NTR NL-7391
CSA DEKRA Certification B.V.	C22.2 No. 182.3	1961671
UL UL International Germany GmbH	UL 2459	E313353

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 873-902



Documentation

Additional Information

Technical Section

pdf
2142.18 KB



Bid Text

873-902

19.02.2019

xml
3.11 KB



873-902

21.02.2019

docx
14.78 KB



CAD/CAE-Data

CAD data

2D/3D Models 873-902



CAE data

ZUKEN Portal 873-902

