






Color: white

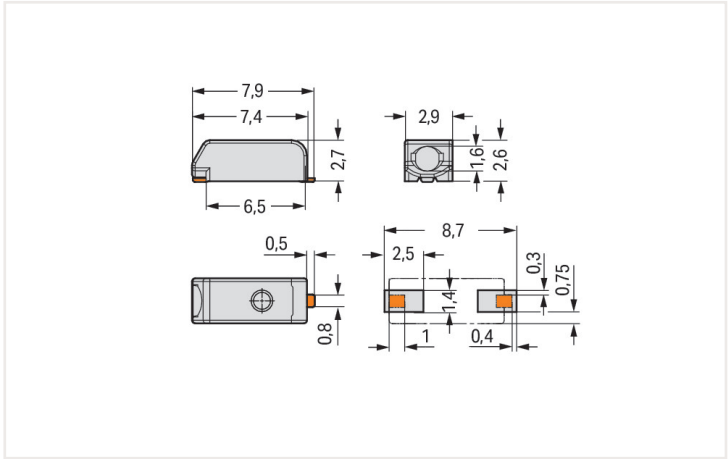

Dimensions in mm

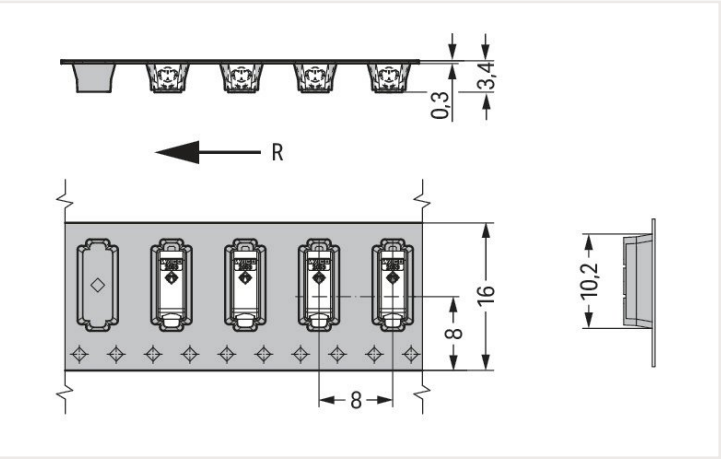

Dimensions in mm

R = feed direction

- SMD PCB terminal blocks with PUSH WIRE® connection technology
- Push-in termination of solid conductors
- Easy conductor removal via operating tool
- Just 2.7 mm tall
- Assemble terminal blocks without pole loss
- Available in tape-and-reel packaging for automated assembly

Notes	
Note	Application notes: Suitable for lead-free, reflow-soldering profiles per DIN EN 61760-1 and IEC 60068-2-58 up to max. 260°C peak temperature. Due to application-specific variables (component configuration and orientation, type of soldering machine, solder paste), trial runs are recommended to ensure product and process compatibility under actual manufacturing conditions. Depending on reflow soldering temperatures and times, color deviations may occur. These deviations will have no impact on functionality.
Recommendation	Recommendation for stencil: 150 µm material thickness; Pattern layout identical to solder pad layout

Electrical data

Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Nominal voltage (III/3)	63 V
Rated impulse voltage (III/3)	2.5 kV
Rated voltage (III/2)	160 V
Rated impulse voltage (III/2)	2.5 kV
Nominal voltage (II/2)	320 V
Rated surge voltage (II/2)	2.5 kV
Rated current	3 A
Legend (ratings)	(III / 2) $\triangleq$ Overvoltage category III / Pollution degree 2

Ratings per UL

Rated voltage (UL 1977)	600 V
Rated current UL 1977	3 A

Connection data

Connection points	1
Total number of potentials	1
Number of connection types	1
Number of levels	1

Connection 1

Connection technology	PUSH WIRE®
Actuation type	Operating tool
Solid conductor	0.14 ... 0.34 mm ² / 26 ... 22 AWG
Note (conductor cross-section)	For conductors (26 AWG) that are not rigid enough, the clamping unit must be opened using an operating tool.
Strip length	4 ... 5.5 mm / 0.16 ... 0.22 inches
Conductor connection direction to PCB	0°
Pole number	1

Connection 2

Solid conductor 2	0.5 mm ² / 20 AWG
Note (conductor cross-section) 2	No reconnection of smaller conductor cross-sections (0.5 mm ² /20 AWG)
Strip length 2	6 ... 7.5 mm / 0.24 ... 0.3 inches

Physical data

Pin spacing	3 mm / 0.118 inches
Width	2.9 mm / 0.114 inches
Height	2.7 mm / 0.106 inches
Depth	7.9 mm / 0.311 inches
Reel diameter of tape-and-reel packaging	330 mm
Tape width	16 mm

Plug-in connection

Plugging without loss of pin spacing	Yes
--------------------------------------	-----

PCB contact

PCB contact	SMD
Solder pin arrangement	over the entire terminal strip (in-line)
Number of solder pins per potential	2



Material Data		
Note (material data)	Information on material data can be found here	
Color	white	
Material group	I	
Insulation material	Polyphthalamide (PPA GF)	
Flammability class per UL94	V0	
Contact material	Copper alloy	
Contact plating	Tin	
Fire load	0.002 MJ	
Weight	0.1 g	

Environmental requirements		
Limit temperature range	-60 ... +105 °C	

Commercial data		
Product Group	33 (Printed Circuit)	
eCl@ss 10.0	27-14-11-06	
eCl@ss 9.0	27-14-11-06	
ETIM 8.0	EC001284	
ETIM 7.0	EC001284	
PU (SPU)	31800 (2650) pcs	
Packaging type	Box	
Country of origin	CH	
GTIN	4055143082679	
Customs tariff number	85369010000	

Approvals and certificates		
General approvals		



Approval	Standard	Certificate name
CCA DEKRA Certification B.V.	EN 60947	NTR NL-7819
CCA DEKRA Certification B.V.	EN 60947	71-111131
CCA DEKRA Certification B.V.	EN 60838	NTR NL-7720
KEMA/KEUR DEKRA Certification B.V.	EN 60838	71-106226
UL Underwriters Laboratories Inc.	UL 1977	E45171



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance	2059-301/998-403		

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 1949.09 KB	

CAD/CAE-Data

CAD data			
2D/3D Models	2059-301/998-403		

CAE data			
ZUKEN Portal	2059-301/998-403		

1 Compatible products

1.1 Optional accessories

1.1.1 Board-to-board link

1.1.1.1 Board-to-board link



Item no.: 2059-901
Board-to-Board Link; Pin spacing 3 mm;
1-pole; Length: 15.3 mm; white



Item no.: 2059-901/018-000
Board-to-Board Link; Pin spacing 3 mm;
1-pole; Length: 17.5 mm; white



Item no.: 2059-901/021-000
Board-to-Board Link; Pin spacing 3 mm;
1-pole; Length: 20.5 mm; white

1.1.2 Tool

1.1.2.1 Operating tool



Item no.: 206-859
Operating tool; for 2059 Series; multicoloured



Item no.: 2059-189
Operating tool; made of insulating material; for 2059 Series

Installation notes

Conductor termination

Insert solid conductors via push-in termination.

Conductor termination

Easy conductor removal, e.g., via operating tool (Item No. 206-859) or “twist & pull” (max. 10 x, no reconnection of smaller conductors possible)